

You spin me right round, Baby, right round...

The 3G Warp Engine Transmitter rotates any video signal up to 360 degrees.

The 3G Warp Engine Transmitter can be added to a currently installed Just Add Power 3G system to rotate any source in the system.

A single 3G Warp Engine Transmitter can build a full Mosaic Video Wall with displays rotated at any angle* and the ability to show any source in the system!

Seamless Integration! The 3G Warp Engine Transmitter is fully compatible with all 3G installations. Add a single Warp Engine to provide rotation to all displays. Multiple Warp Engines can be combined to produce more complex Mosaic Video Walls.



TX - VIDEO OUT


RX - VIDEO IN

Compliance	HDCP 2.2 & RoHS/FCC/CE
Supported Video & Audio	Up to 4096x2160 Uncompressed multi-channel audio
Encryption	Hardware-Based AES 256-bit Encryption of Network Video Signal
Ports	Ethernet connector (x2)
Dimensions & Weight	220x44.5x124mm/8.66x1.75x4.88inch (19-inch rack, 1 RU with wings) 0.64 kg / 1.4 lb
Operating Temp	0-60 °C / 32-140 °F
Bandwidth	Up to 600 Mbps
Power Supply (not included)	DC12V, 2A minimum 5.5mm/2.1mm, Positive tip
POE	20 watts maximum


Features
Rotate video up to 360 degrees
<ul style="list-style-type: none"> 1 Receiver and 1 Transmitter Any video input from 3G system New, rotated video output Rotated video viewable on any Receiver
Compatible with all 3G products
Image Pull



All measurements in millimeters (mm)

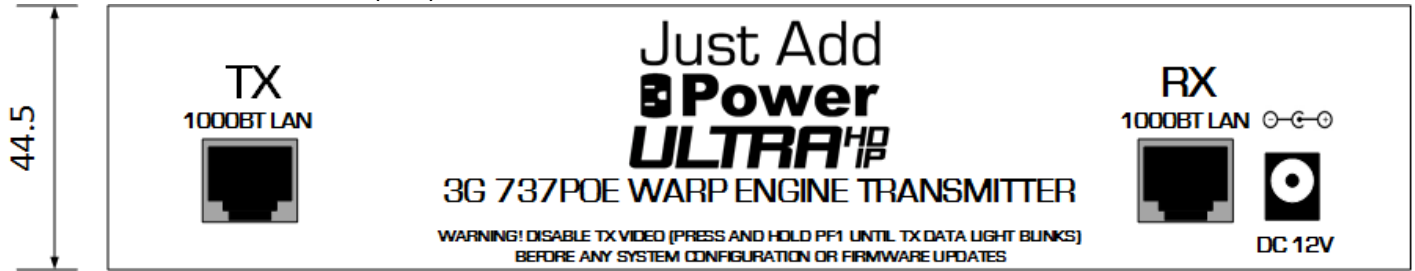

220

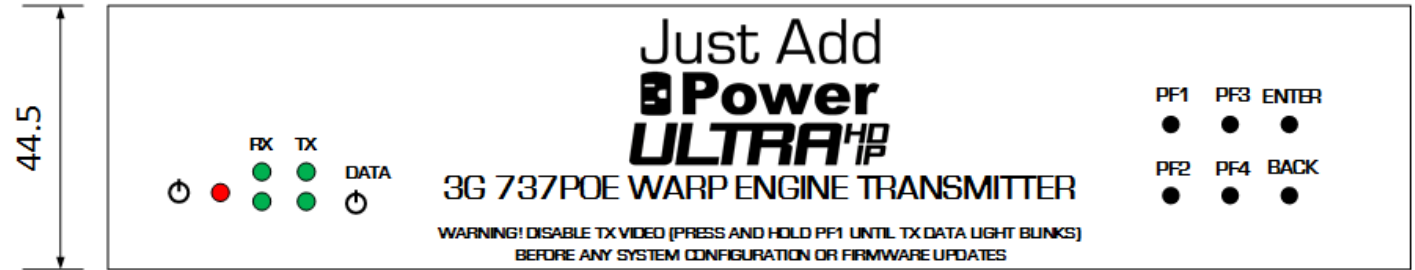

737POE Front and Back