

## The new standard in SDI matrix technology

The Just Add Power 2GΩ/3G+ SDI POE Transmitter adds SDI support to the 3G HD over IP system and has all of the features of:

- **SD-/HD-/3G-SDI formats**
- **Stereo output with audio delay**
- **Local HDMI Loopout**
- **Null Modem-integrated RS232**
- **HDMI Pass-through**



**Mix-and-match!** The 2GΩ/3G+ SDI POE Transmitter is fully compatible with all 2GΩ/3G and 3G devices. Add an SDI source to your HD over IP system without the need for an SDI-HDMI converter.



Features	
SD-/HD-/3G-SDI up to 1080p	
HDMI Pass-through	
Control endpoints with RS232 & IR	
Stereo audio output + 170ms audio delay	
Image Play – Push, Pull & Pop	

<b>Compliance</b>	HDCP & RoHS/FCC/CE
<b>Operating Temp</b>	0-60 °C / 32-140 °F
<b>Supported Resolutions</b>	Up to 1080p50/60 Hz PC: 1920 x 1200 SDI: SD/HD/3G
<b>Dimensions &amp; Weight</b>	158 x 30 x 125 mm 6.2" x 1.2" x 4.9" 0.54 kg / 1.2 lb
<b>Ports</b>	SDI In HDMI Out Ethernet connector 3.5mm Stereo Out 3.5mm RS232 w/ null modem
<b>Bandwidth</b>	180-500 Mbps
<b>Power Supply (not included)</b>	DC5V, 2A minimum 5.5mm/2.1mm, Positive tip
<b>POE</b>	10 watts maximum



**ETHERNET**


**SDI IN**

**HDMI OUT**


**STEREO**

**RS232**

All measurements in millimeters (mm)

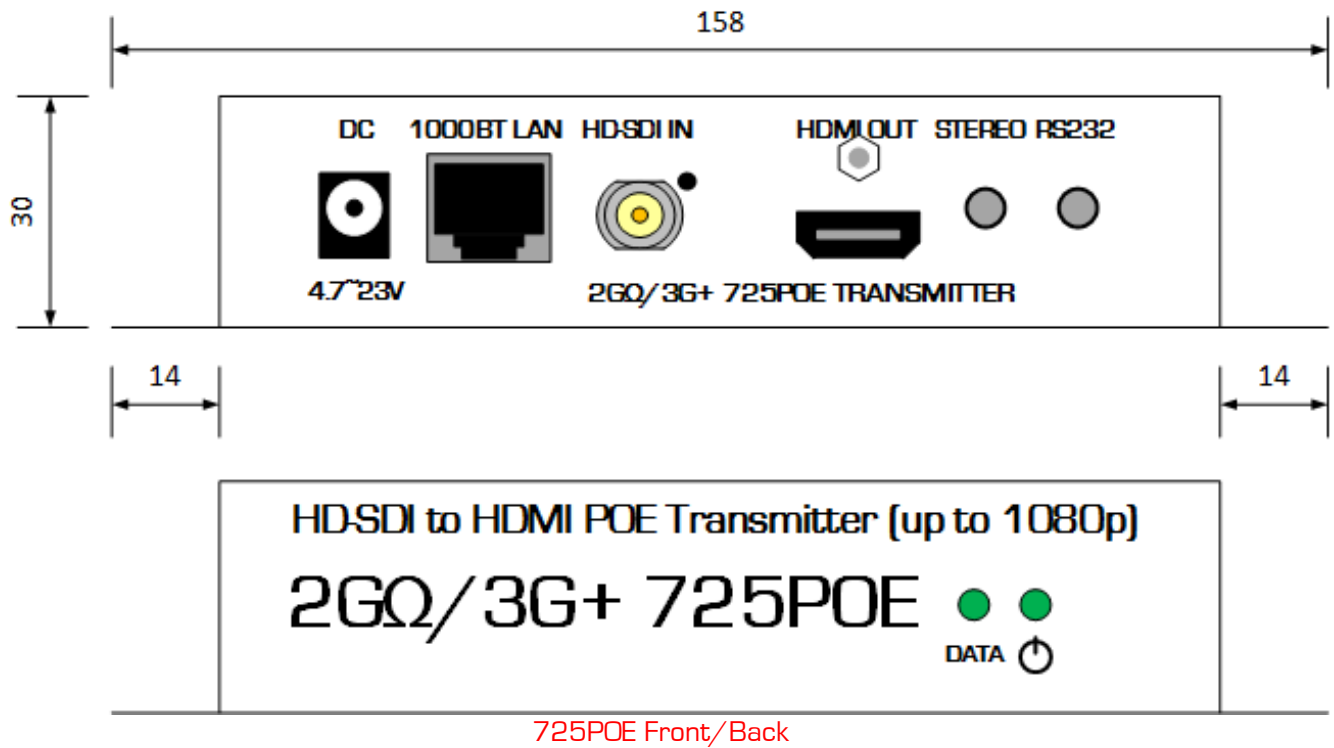

725POE Front/Back

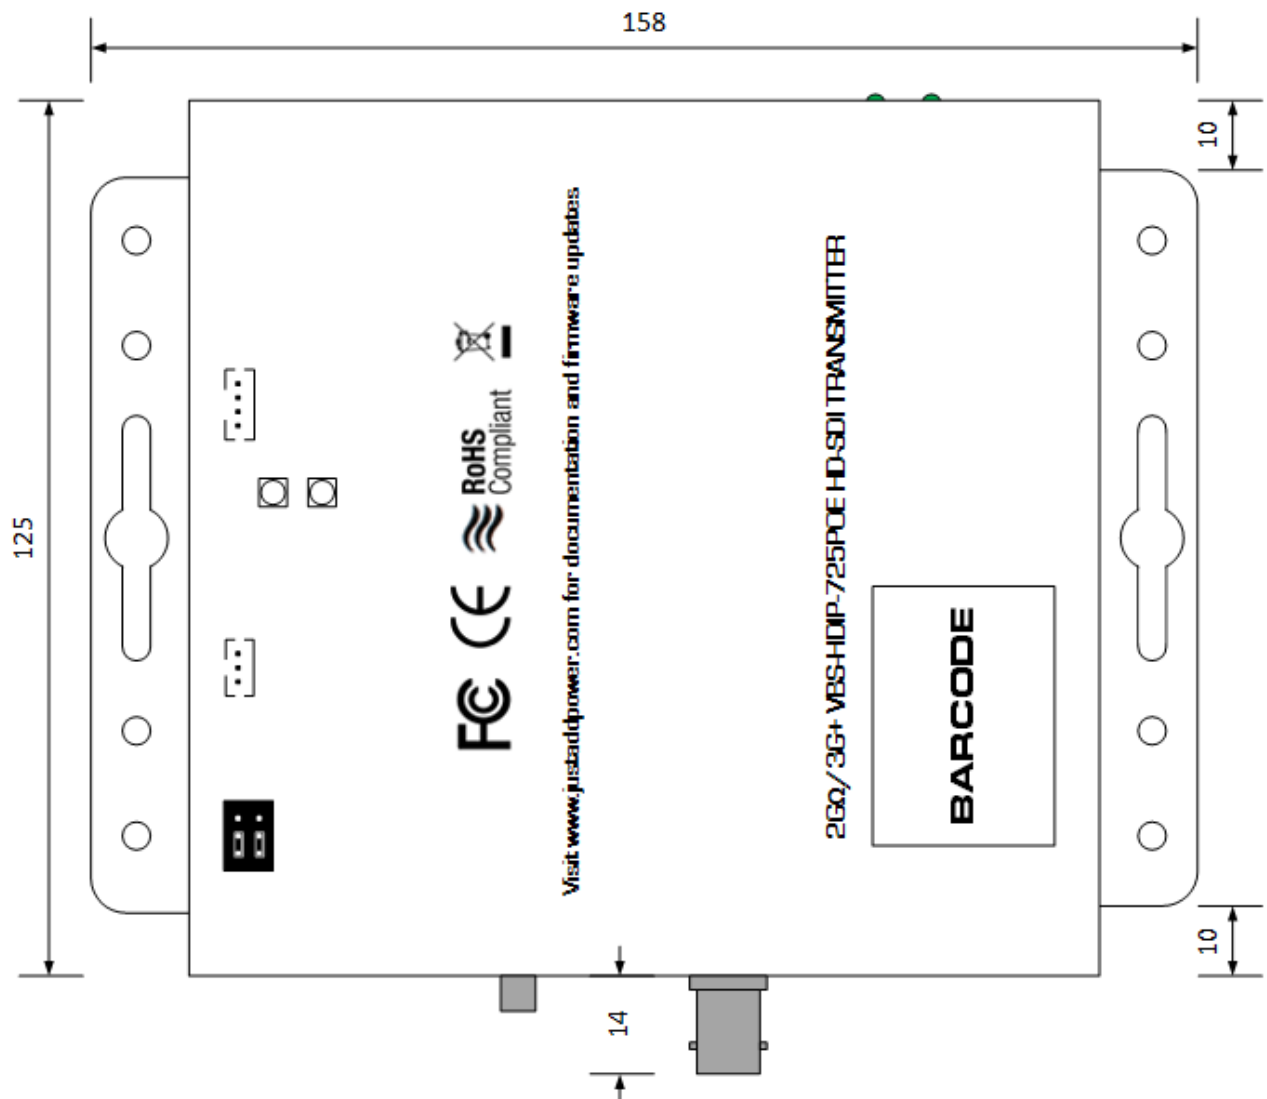

725POE Bottom