

3G ULTRA 767DSS Transmitter

VBS-HDIP-767DSS

Just Add
Power

Input and Extract up to 8 Channels from the Dante® network


AES67 Compatibility Mode

The 3G Ultra 767DSS Dante® Sound System Transmitter adds compatibility with Dante® and AES67 audio networks to the any Just Add Power video distribution system.

Mix-and-match the 3G Ultra 767DSS Transmitter with any 3G Ultra and 2G Omega devices.

Not just for Dante.

AES67 compatibility for interoperability with other leading audio-over-IP technologies.

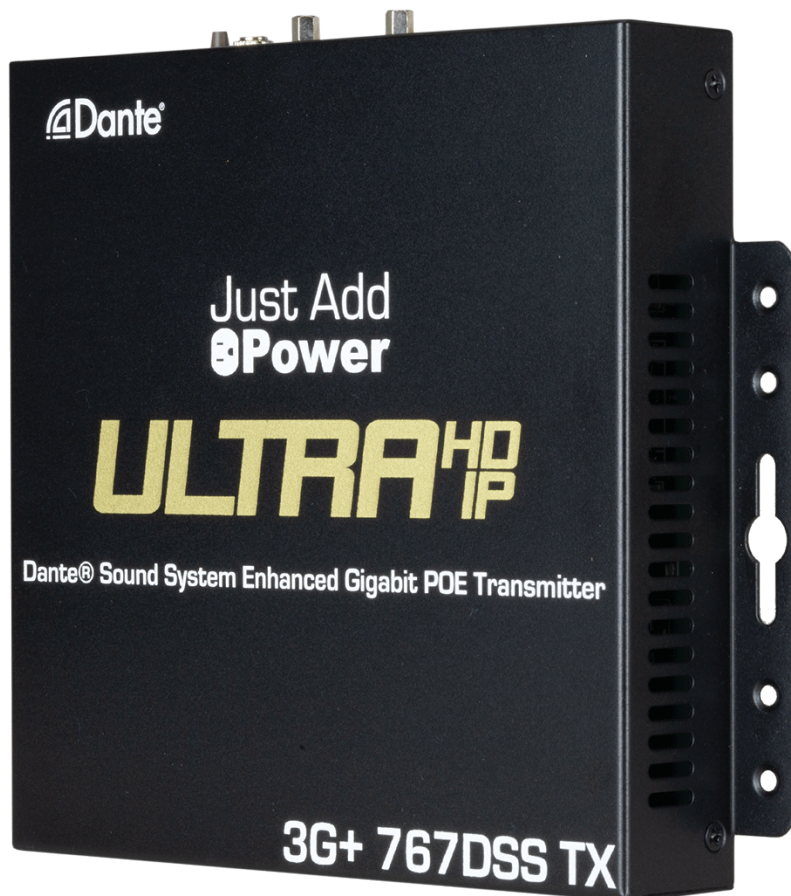

Features


Audio	Input LPCM audio up to 8 channels	Integrated Endpoint Control	Control endpoints with RS232, IR, and CEC
	Dante® audio send and receive up to 8 channels	Image Pull	Preview an image from any source or display, in any web browser or control system, at up to 10 fps
	Inject Dante® audio into the J+P network	Scalability	Fully compatible with all 3G Ultra and 2G Omega products
HDMI	HDMI pass-through		

3G ULTRA 767DSS Transmitter

VBS-HDIP-767DSS


Just Add
Power

Front of Device:

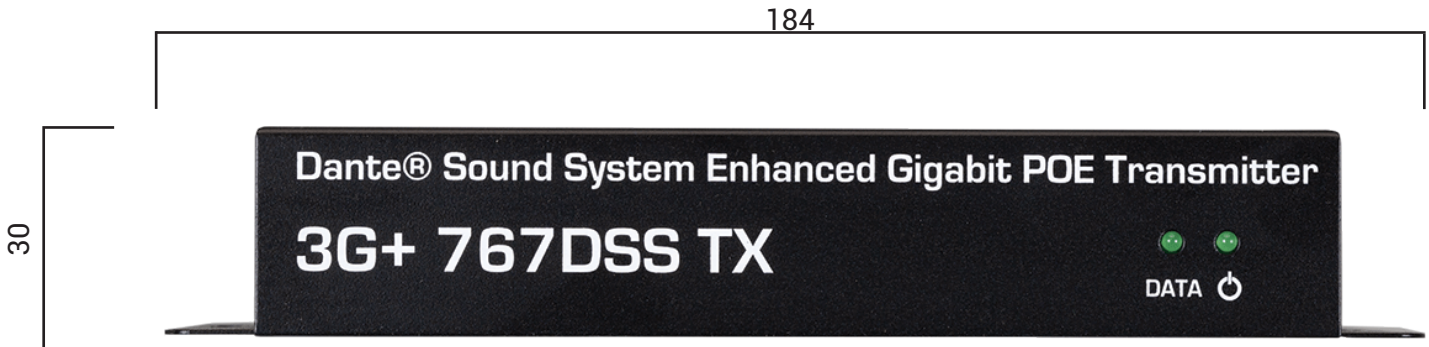

All measurements in millimeters (mm)

Back of Device:

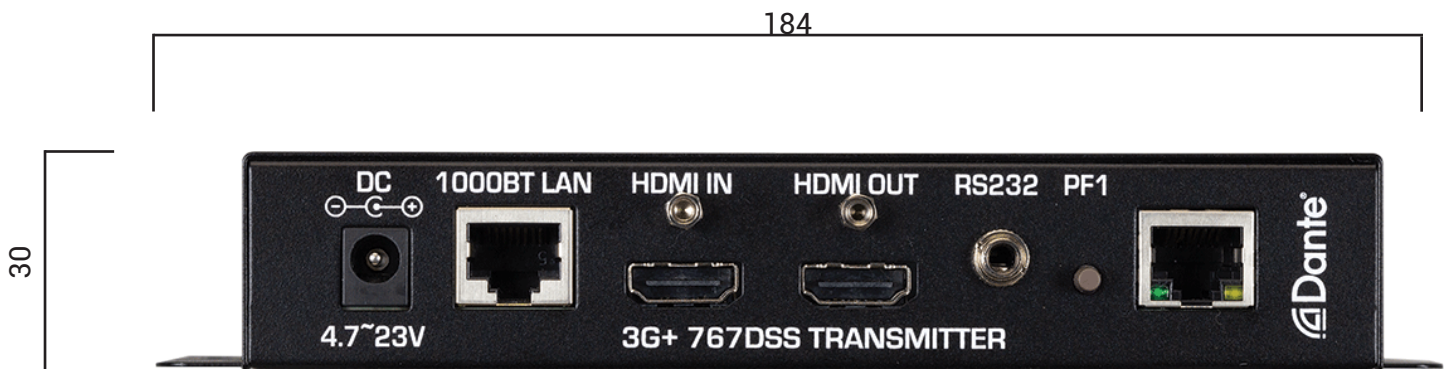

All measurements in millimeters (mm)

Specifications

Bandwidth	180-500 Mbps	POE	10 watts maximum
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	Gigabit Ethernet HDMI In HDMI Out 3.5mm RS232 w/null modem Dante Gigabit Ethernet
Dimensions & Weight	184 x 30 x 152 mm 7.2" x 1.2" x 6.0" inch 0.45kg / 1.0 lb	Power Supply (not included)	~4.7-23V 5.5mm/2.1mm, positive tip
Encryption	Hardware-Based AES 256-bit Encryption of network video signal	Supported Resolutions	Up to 4096x2160 (interlaced & progressive)
Operating Temp	0-60 °C / 32-140 °F		