

3G ULTRA 749AVP Rackmount

VBS-HDIP-749AVP

Just Add
Power



Dolby Digital 5.1 Downmix with Stereo Out & USB

The 3G Ultra 749A Rackmount 3-in-1 Transmitter distributes 4K video over a single Cat5e cable, along with Dolby Digital 5.1.

Distribute Dolby Pro Logic II audio to pass multichannel audio to multichannel zones and stereo audio to 2-channel zones. The 749A encodes a 4K or lower-resolution source device into an IP signal and sends it over the network with ultra-low latency and instant switching; and supports USB 2.0 and KVM; along with all the 4K system wide features from the 3G Ultra product line.

Features


Audio	Dolby Digital 5.1 & stereo simultaneously Analog audio mixable with HDMI audio Stereo audio output 3.5mm Adjustable volume & delay	Image Pull	Preview an image from any source or display in any web browser or control system - up to 10 fps
HDCP 2.2 Support	Display content with HDCP 2.2 copy/content protection on any HDMI screen in system	Integrated Endpoint Control	Control endpoints with RS232, CEC and IR
		Scalability	Fully compatible with all 3G Ultra and 2G Omega products

3G ULTRA 749AVP Rackmount

VBS-HDIP-749AVP

Just Add
Power

Port Side:

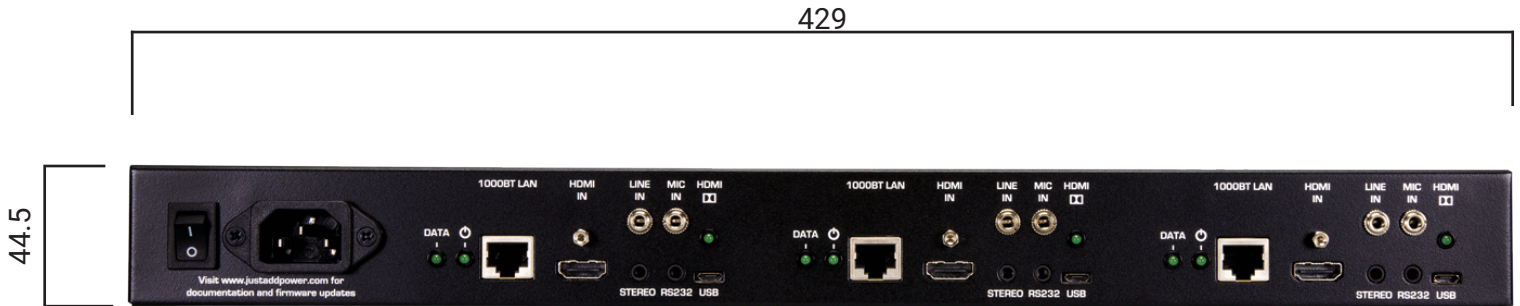

All measurements in millimeters (mm)

Specifications

Bandwidth	180-500 Mbps	Power Usage	30 watts maximum
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	3 x Gigabit Ethernet 3 x HDMI In 3 x 3.5mm Line-In 3 x 3.5mm Mic-In 3 x 3.5mm Stereo Out 3 x 3.5mm RS232 w/ null modem 3 x Micro-USB 2.0
Dimensions & Weight	429 x 44.5 x 250 mm 17" x 1.75" x 9.8" in (19-inch rack, 1 RU) 3.0 kg / 6.6 lb	Power Supply (included)	Standard power cable IEC 60320 C13/C14
Encryption	Hardware-Based AES 256-bit Encryption of network video signal	Supported Resolutions	Up to 4096x2160 (interlaced & progressive)
Operating Temp	0-60 °C / 32-140 °F		