

## The new standard in HDMI matrix technology

The Just Add Power 2G PoE Receiver is the display-side decoding device in the HD over IP matrix system.

- **Connects to display via HDMI**
- **Connects to network via Ethernet**
- **Instant-seamless Switching**
- **Video Wall**
- **Image Pull**
- **2-way RS232 control**




**Not your ordinary matrix!** Don't settle for simple matrix control when you can have all of these features built-in. 2G PoE Receivers are fully compatible with all 2G and 2G+AVP models.




Features
Stereo or multi-channel audio
Instant-seamless Switching
Video Wall
Image Pull
2-way RS232 control
Image Push
On-Screen Display


<b>Compliance</b>	HDCP & RoHS/FCC/CE
<b>Operating Temp</b>	0-60 °C / 32-140 °F
<b>Supported Resolutions</b>	Up to 1080p50/60 Hz PC: 1920 x 1200
<b>Dimensions &amp; Weight</b>	189 x 28 x 127 mm 7.4" x 1.1" x 5.0" 0.45 kg / 1.0 lb
<b>Ports</b>	HDMI Out Ethernet connector RS232 (Male DB9)
<b>Bandwidth</b>	Up to 150 Mbps
<b>Power Supply (not included)</b>	DC5V, 2A minimum 5.5mm/2.1mm, Positive tip
<b>PoE</b>	10 watts maximum

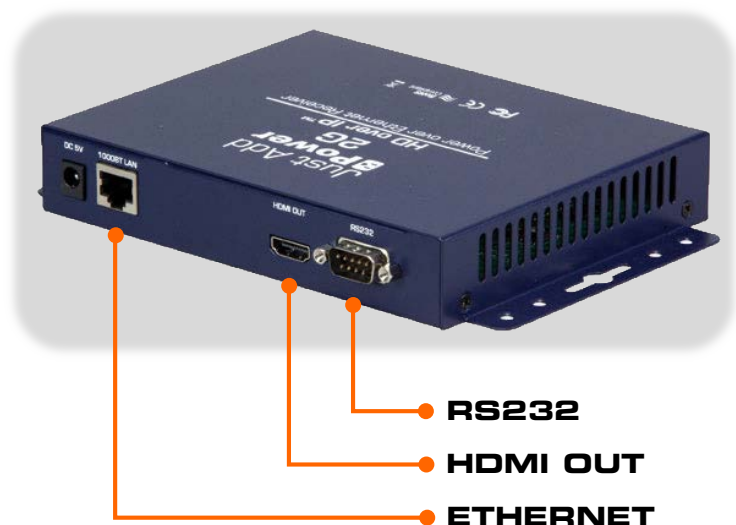

All measurements in millimeters (mm)

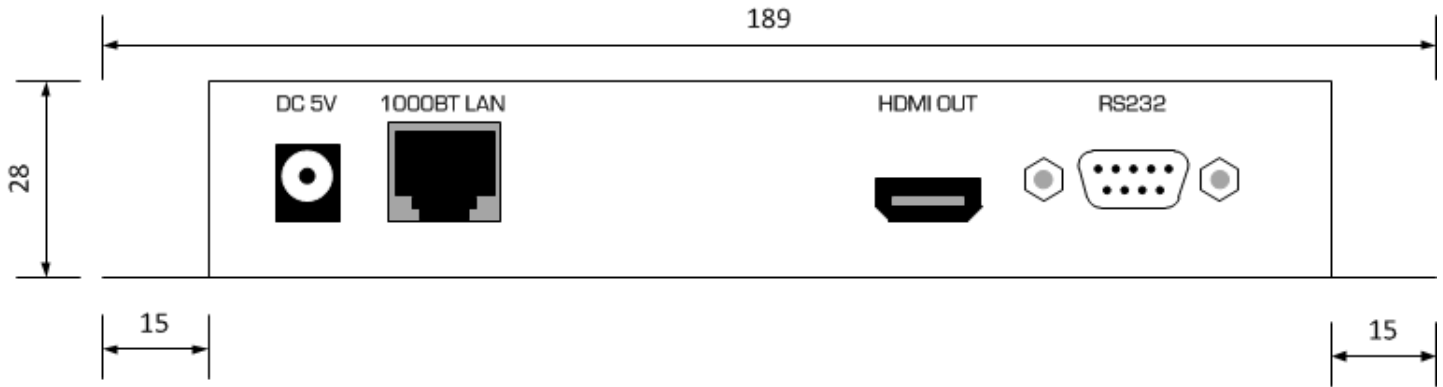

208PoE Front/Back

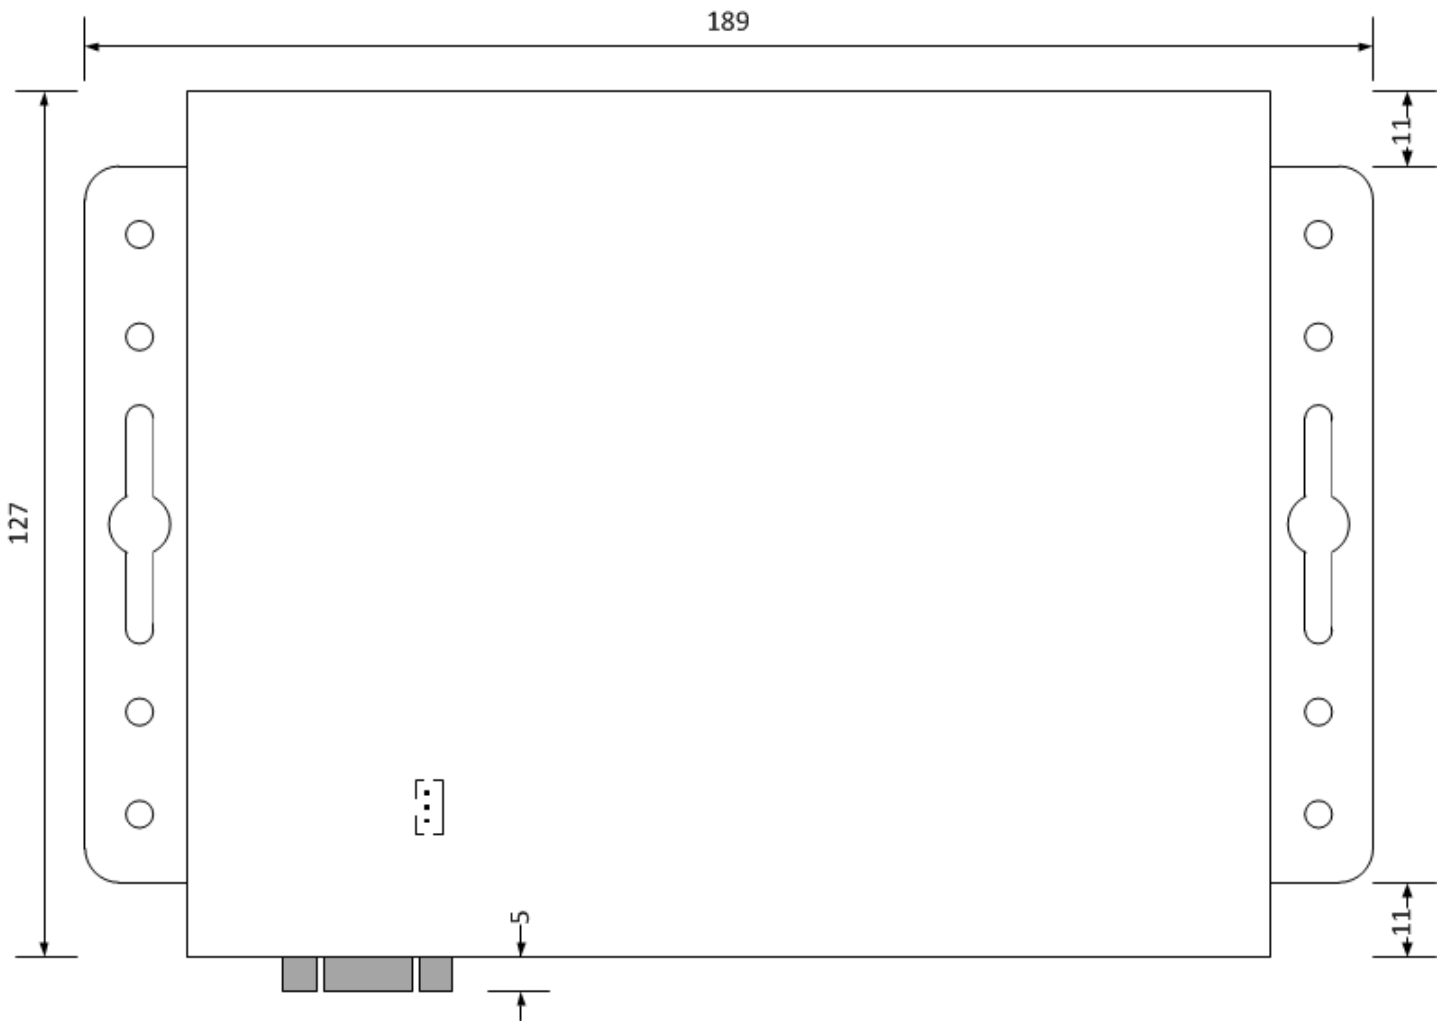

208PoE Bottom