

# 3G ULTRA 718 Wallplate Transmitter

Just Add  
**Power**

VBS-HDIP-718WP4

## Dolby Digital 5.1 Downmix with Stereo Out, USB & VGA Wallplate



The 3G Ultra 718WP4 Wallplate Transmitter fits into a 4-gang construction box and provides multiple video and audio inputs and outputs to any Just Add Power video distribution system.

Distribute Dolby Digital 5.1 audio to every zone and transform to stereo audio for 2-channel zones. Mix-and-match the 3G Ultra 718WP4 Transmitter with any 3G Ultra or 2G Omega models to distribute any source to any zone.

### Features


<b>Audio</b>	Dolby 5.1 Downmixing  Stereo Audio Output 3.5mm	<b>KVM Support</b>	Provide local and remote access to all computers on the system with a built-in keyboard, mouse and touchscreen interface at both ends of a connection
<b>Colors</b>	Black, White or Custom	<b>Scalability</b>	Fully compatible with all 3G Ultra and 2G Omega products
<b>HDCP 2.2 Support</b>	Display content with HDCP 2.2 copy/content protection on any HDMI screen in system		

# 3G ULTRA 718 Wallplate Transmitter


VBS-HDIP-718WP4

Just Add  
**Power**

## Front of Device:

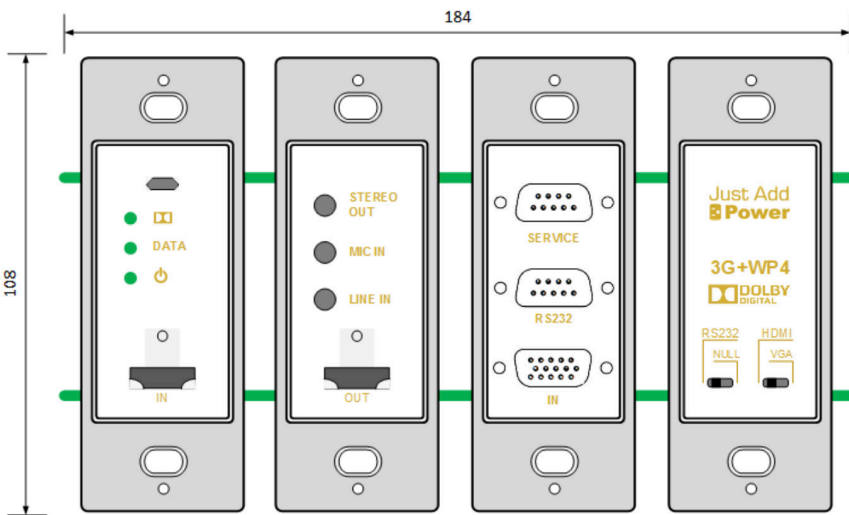

## Side of Device:

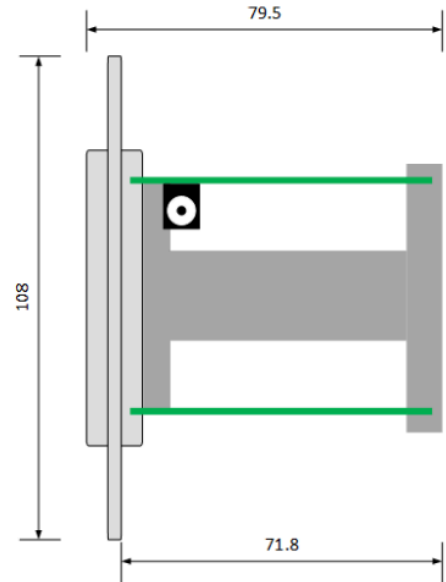

All measurements in millimeters (mm)

## Specifications

<b>Bandwidth</b>	180-500 Mbps	<b>POE</b>	10 watts maximum
<b>Compliance</b>	HDCP 2.2 RoHS/FCC/CE	<b>Ports</b>	Gigabit Ethernet HDMI In HDMI Out 3.5mm Line-In 3.5mm Mic-In 3.5mm Stereo Out DB9F RS232 w/ null modem DB9M Service port Micro-USB 2.0 5.5mm/2.1mm barrel
<b>Dimensions &amp; Weight</b>	108 x 184 x 79.5 mm 4.3" x 7.2" x 3.1" inch 0.27kg / 0.6 lb	<b>Power Supply (not included)</b>	~4.7-23V 5.5mm/2.1mm, Positive tip
<b>Encryption</b>	Hardware-Based AES 256-bit Encryption of network video signal	<b>Supported Resolutions</b>	Up to 4096x2160 (interlaced & progressive)
<b>Operating Temp</b>	0-60 °C / 32-140 °F		